



PCM607/PCM608

Communication Devices Inc.

Power Control Module


<http://www.commddevices.com>

Redundant Power Control Module


Remotely Power Re-Boot Equipment
with redundant power supplies

- ✓ Dual input/output for redundant supplies
- ✓ 110VAC 60Hz 10 AMP
- ✓ 220VAC 50Hz 10AMP
- ✓ RoHS compliant
- ✓ Compatible with ALL CDI SOOB products
- ✓ “Always On” Default
- ✓ LED status indicator
- ✓ 2 x IEC 60320 C13 INLET
- ✓ 2 x IEC 60320 C14 OUTLET
- ✓ Adapter cables provided for U.S. version (C14 to NEMA outlet)
- ✓ Retainer Clips Standard

PCM607 REAR

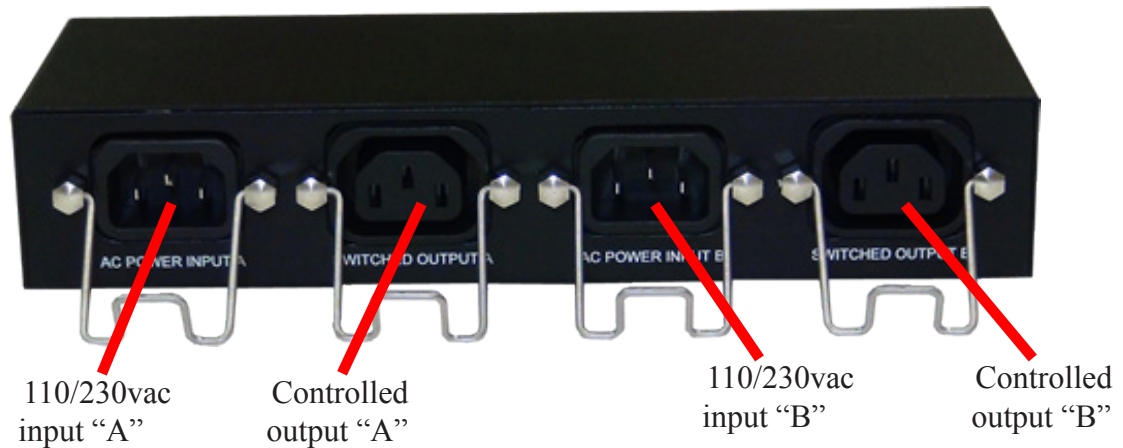

PCM607 FRONT

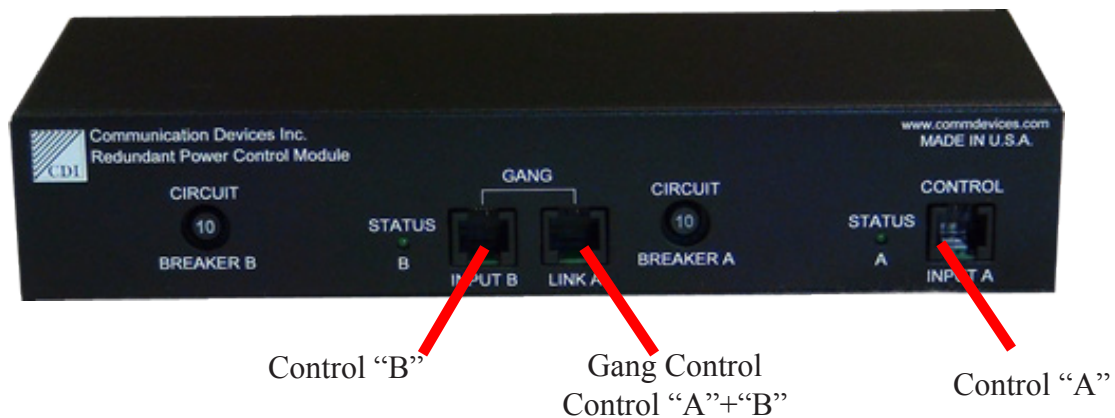

<http://www.outofbandmanagement.com>



PCM607/PCM608 Rackmount

Communication Devices Inc.

PCM607/608

<http://www.commdesives.com>

“1U” RACKMOUNT RAIL

PCM BKT 804 Rackmount 701 with 2 PCM607 devices


PCM BKT 805 Rackmount 701 with 2 PCM608 devices



Equivalent of 4 PCM's that can be “ganged” into 2 Redundant PCM's or run as 4 independent PCM's (4 x PCM601)



4 x 10amp AC power inputs and 4 x 10amp AC power outputs

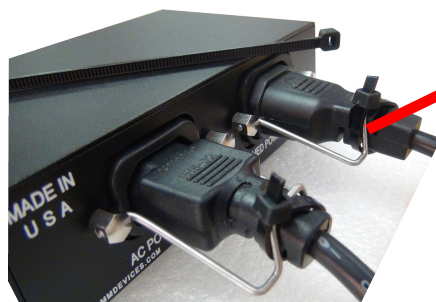

Retainer Clips with Tie Wraps

PCM607 - 110VAC

PCM608 - 230VAC

BKT804 = 2 x PCM607

BKT805 = 2 x PCM608

<http://www.outofbandmanagement.com>