




<http://www.commdevices.com>

Power Control Module

Remotely Power Re-Boot Equipment

- ✓ Dual Output version for redundant supplies
- ✓ 110VAC 60Hz 10 AMP
- ✓ 220VAC 50Hz 10AMP
- ✓ RoHS compliant
- ✓ Compatible with ALL CDI SOOB products
- ✓ “Always On” Default
- ✓ LED status indicator
- ✓ IEC 60320 C13 INLET
- ✓ IEC 60320 C14 OUTLET
- ✓ Adapter cables provided for U.S. version (C14 to NEMA outlet)
- ✓ Retainer Clips Standard

PCM601

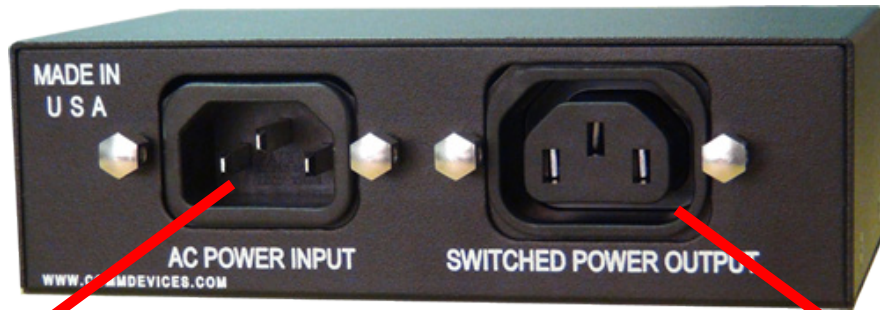


110/230vac input

PCM601 Single power output

Controlled Output
-2 Paired

PCM602

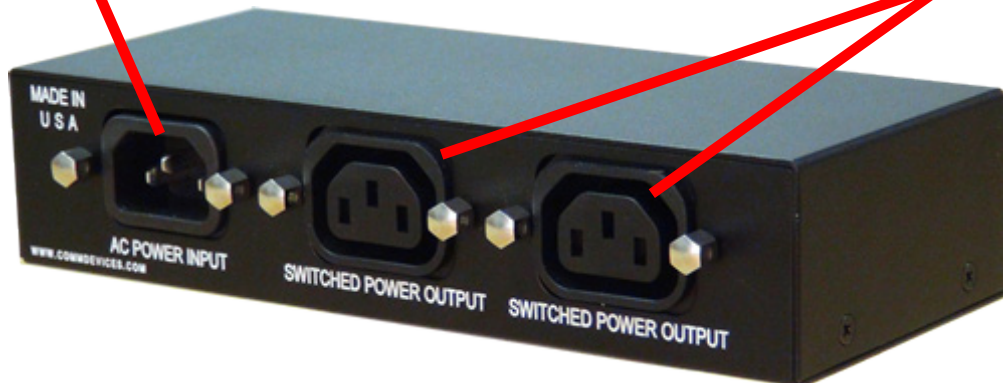

PCM602 Dual power output for Redundant supplies

<http://www.outofbandmanagement.com>




<http://www.commdesives.com>



10 AMP
Breaker

Status LED

Control input from
CDI OOB Device

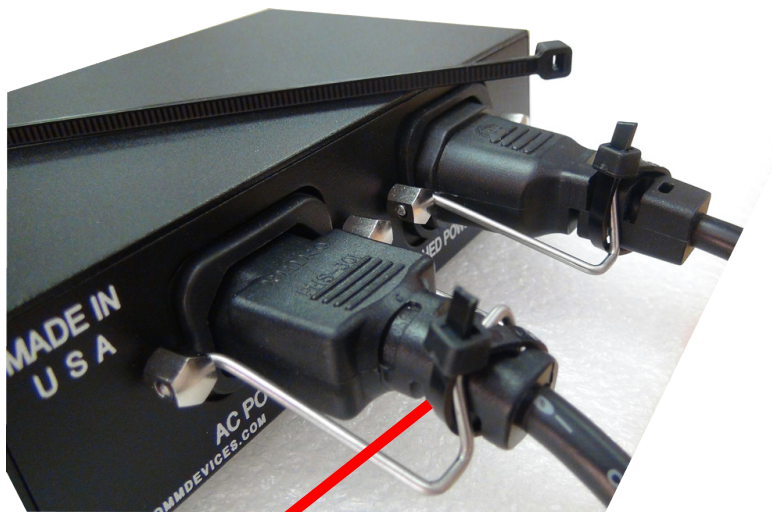


Retainer Clips with Tie Wraps

“1U” RACKMOUNT RAIL available for up to 3 PCM601 and 2 PCM602



“1U” RACKMOUNT RAIL

PCM BKT 801 Rack Mount 2 PCM601 devices

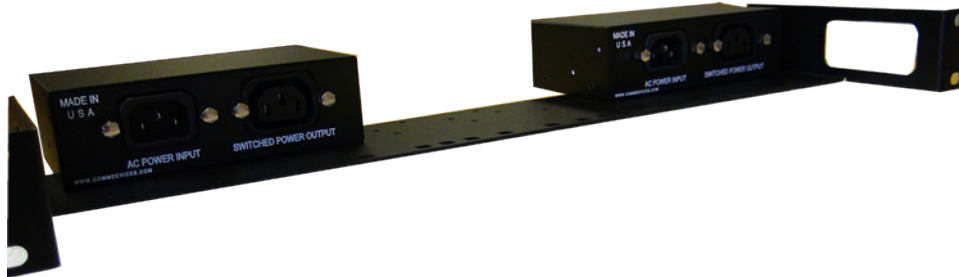

PCM BKT 802 Rack Mount 3 PCM601 devices



PCM's are recessed so that power cables can be routed to them neatly

PCM BKT 803 Rack Mount 2 PCM602 devices



PCM's are recessed so that power cables can be routed to them neatly