


SERIAL Power Control Module

PCM620

Remotely Power Re-Boot Equipment with SERIAL commands

- > Serial Control
- > Daisy Chain Multiple units
- > Dual output
- > 110/240VAC 10 AMP
- > ROHS Compliant
- > "Always On" Default
- > LED status indicator
- > 1 x IEC 60320 C13 INLET
- > 2 x IEC 60320 C14 OUTLET
- > Adapter cables provided 2 x C13 to C14 cables
- > Retainer Clips Standard

PCM620 REAR

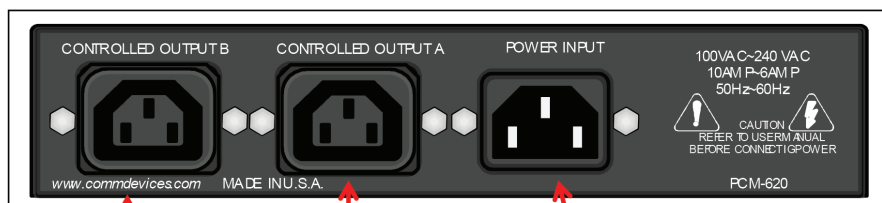


Controlled output "B"

Controlled output "A"

110~240VAC INPUT

PCM620 FRONT

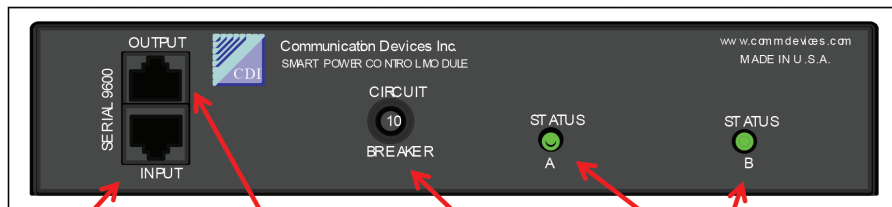

SERIAL INPUT

SERIAL OUTPUT FOR MULTIPLE DEVICES

10 AMP BREAKER

STATUS



Communication Devices, Inc.

The global leader in network security



CALL US: 973.334.1980

Communication Devices, Inc.
85 Fulton Street
Boonton, NJ 07005
www.commdevices.com


SERIAL Power Control Module

PCM620

"1U" RACKMOUNT RAIL

Rackmount 701 with 2 PCM620 devices

Link Devices with Serial connection for More Outlets

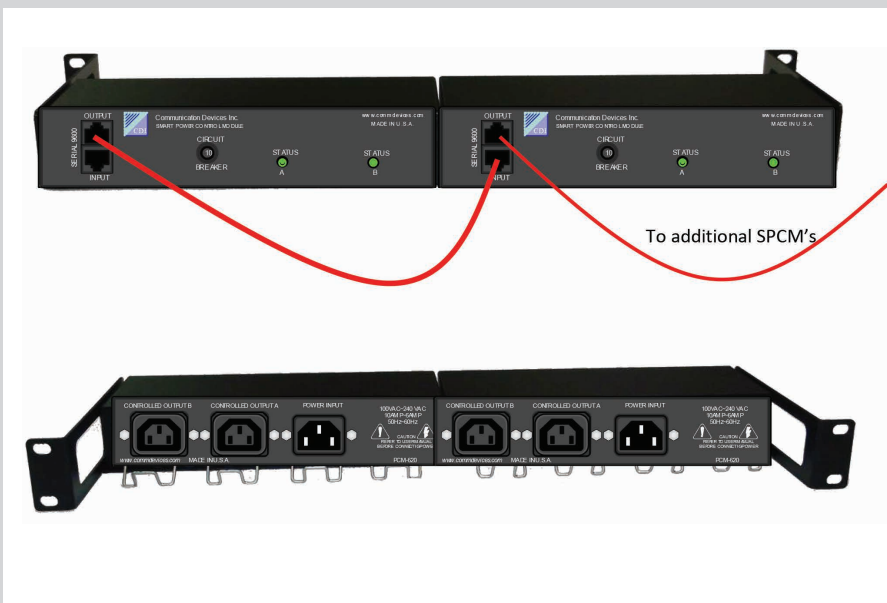

Dimensions:

w 8.5" d 3.1" h 1.7"

Weight: 2.5 Lbs

Part #: PCM 620



Retainer Clips with Tie Wraps



CALL US: 973.334.1980

Communication Devices, Inc.
85 Fulton Street
Boonton, NJ 07005
www.commdevices.com



**Communication
Devices, Inc.**

The global leader in network security